
Spring Rider Motor Complementary Equipment BUJ-MT

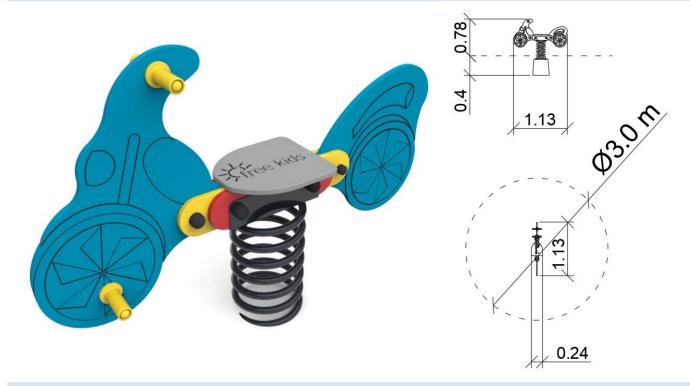

TECHNICAL DATA

Maximum height fall 0,4 m

Dimensions (W x L x H) 0,24 x 0,1,03 x 0,78 m

Safety area dimensions \emptyset 3,0 m Safety area $7,1 \text{ m}^2$

Recommended safety surface According to the norm 1176-1:2017

Available options:

PLATES	HPL and three-coat HDPE panels with milled drawings
STEEL	Galvanized and powder-coated steel elements
FOUNDATIONS	The device permanently sited in the ground with C16 / 20 class concrete
ADDITIONAL ELEMENTS	Bolts and screws protected with plastic end covers; round head nuts

^{*} Due to constant development of technical solutions and designs made by FreeKids s.c. presented renders may vary from currently produced products. Certificate compliant with safety norms PN-EN 1176:2017

